

NOW SLIMMER, JUST IN TIME FOR SUMMER



Dux Proflo 125L electric storage are now available in a narrow diameter model.
Perfect for tight installs where every centimeter counts.



VISIT WWW.DUX.COM.AU FOR MORE INFORMATION

Warranty terms and conditions are in the product's Owners Manual. Visit www.dux.com.au/warranty-terms for full details and conditions which apply.



DESIGNED WITH TIGHT INSTALLATIONS IN MIND


A new addition to the range, the Dux Proflo 125L now also comes in a narrow diameter model to maximise the remaining usable floor space. Compared to the standard Proflo 125L, it boasts a slim, tall design and V-Fit dual handed connections for ease of installation.

All large Proflo electric storage water heaters combine commercial grade Y class enamel with a thicker anode to deliver an even longer lasting water heater. They are backed by a 10 year tank warranty and a company with over 100 years of manufacturing experience in Australia.

PROFLO 80L - 400L

- Easy installation, with water connections on both sides of tank
- Made in Australia
- Low maintenance and long service life
- Full flow pressure to all outlets
- Can be installed indoors or out
- Hard-wearing, tough polymer base resists damage and moisture
- Available in single element and twin element (315L and 400L only)
- Steel tanks feature long life enamel from A. O. Smith and a thicker anode to maximise tank durability
- 10-year tank warranty, including 1-year full parts and labour*


125L NARROW DIAMETER SPECIFICATIONS

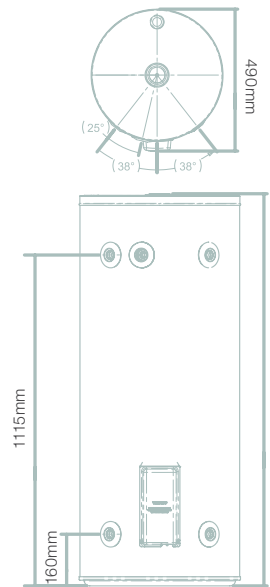

SPECIFICATIONS	80T1	125X1 NARROW DIAMETER	125T1	160T1	250T1	315T1	315T2 TWIN ELEMENT	400T1	400T2 TWIN ELEMENT
Storage Capacity (L)	88	132	130	161	259	321	321	415	415
Hot Water Delivery Rating (L)	80	125	125	160	250	315	315	400	400
Twin Element Boost Capacity (L)	-	-	-	-	-	-	50	-	80
Element Sizes (kW)	1.8, 2.4, 3.6	1.8, 3.6	1.8, 3.6	2.4, 3.6	3.6	3.6	2 x 3.6 or 2 x 4.8	3.6	2 x 3.6
Net Weight Empty (kg)	41	54	51	59	72	93	93	115	115
Relief Valve Pressure (kPa)	1400	1400	1400	1400	1000	1000	1000	1000	1000
Max Inlet Pressure (kPa)	1120	1120	1120	1120	800	800	800	800	800

TANK DIMENSIONS (MM)	80L	125L NARROW DIAMETER	125L	160L	250L	315L	400L
A Overall Height	925	1300	1090	1315	1445	1765	1705
B Overall Diameter	490	490	530	530	620	620	705
C Cold Water Inlet	160	160	190	190	195	195	220
D Hot Water Outlet	735	1115	865	1095	1210	1530	1445

80L - 400L STANDARD MODELS

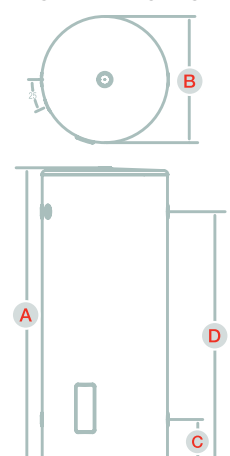

All Dux Proflo water heaters are dual-handed for ease of installation and operate at 240V AC single phase electricity supply. *Warranty terms and conditions are in the product's Owners Manual. Visit www.dux.com.au/warranty-terms for full details and conditions which apply.

© Dux Manufacturing Limited ABN 19 077 879 844. Lackey Rd, PO Box 209 Moss Vale, NSW 2577. The information supplied was correct at time of printing. Specification and materials may change without notice. PROFLO & DUX are registered trade marks of Dux Manufacturing Limited.